

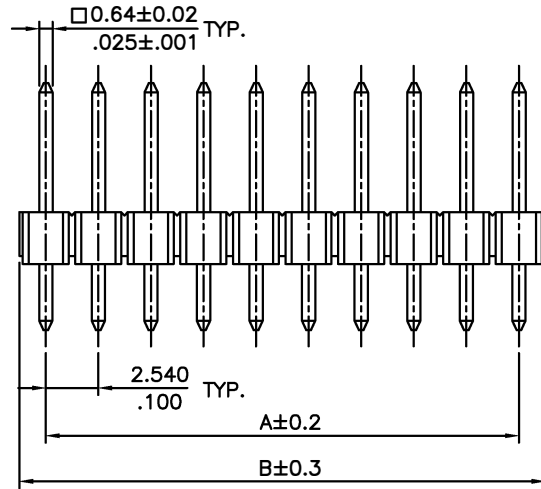



REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	CHANGER



$A = 2.54 \times \text{No. of Spaces}$
 $B = A + 2.36$
 * Available in 4 through 80 circuits

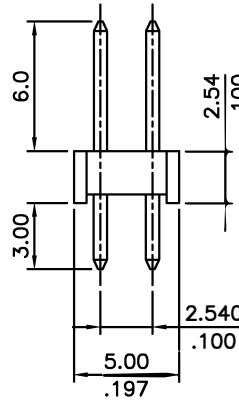

Recommended P.C. Board Layout

Material:
 * Contact: Brass

Insulation: PBT UL 94V-0, Color Black

Ordering Code:

P84M8X0D - XX 0 8
 ① ② ③ ④ ⑤

- ① Series No.
- ② Plating code:
G=Gold Flash plated over
1.27 μm (50 μ) Nickel
- ③ No. of Contact: 04 to 80
- ④ OTHER OPTIONS:
0=STANDART
- ⑤ PACKING

GENERAL TOLERANCE		ALL LINK CONN. TECHNOLOGY CORP.			
X±	X°± 1°				
.XX± 0.30	.X°±				
.XX± 0.20	.XX°±				
.XXX± 0.10	.XXX°±				
CUSTOMER DRAWING		PART NO. P84M8X0D-XX08		DWG NO. 20130412	
APPROVED Paul	CHECKED: Paul	DRAWN: sunny	UNIT mm	SCALE: 4:1	SHEET: 1 / 1
		PROJ.		REV. A	