
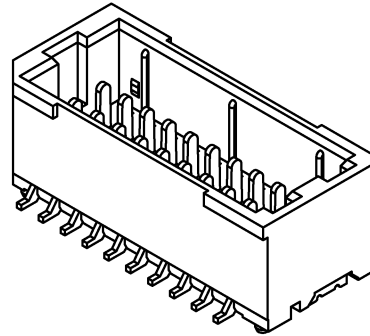


REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	CHANGER

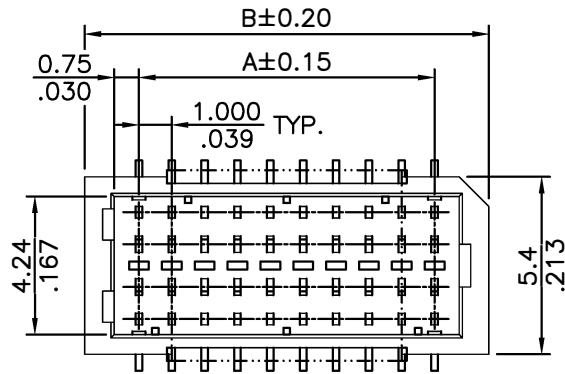


Material:

Base: High Temperature plastic Nylon 6T UL 94V-0
Color Nature



Contact: Phosphor Bronze

Tab: Brass


PAD: High Temperature plastic UL 94V-0
Color Nature

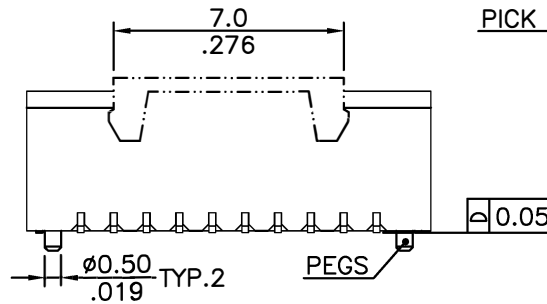

PICK & PLACE PAD

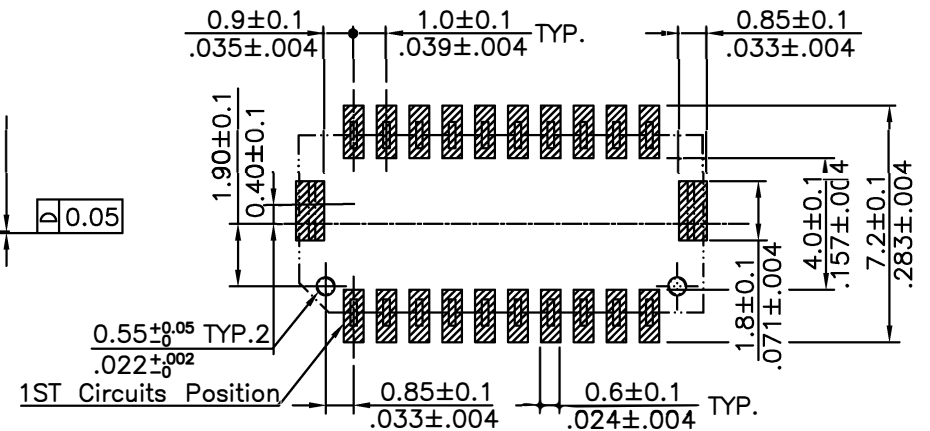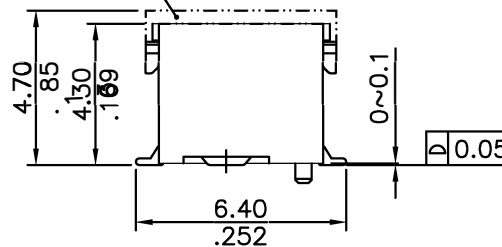

Recommended P.C. Board Layout

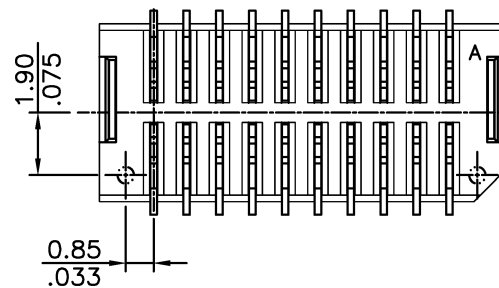

Ordering Code:

TS102WV-S-X X X X
① ② ③ ④

① Series No.

② Contacts: 10,12,16,20,30,40,50

③ Plating:

G= Gold flash plated over 50u" Nickel
With Pegs (Standard)

3= Gold flash plated over 50u" Nickel
Without Pegs

④ A= Tape & Reel packing(Standard)

C= Tube packing

DIM. A = 1.00 x NO. OF SPACES

DIM. B = DIM. A + 3.3

* AVAILABLE IN 10,12,16,20,30,40,50 CIRCUITS

GENERAL TOLERANCE		ALL LINK CONN. TECHNOLOGY CORP.	
X±	X*± 1°		
X± 0.30	X*±	TITLE: 1.00MM STRAIGHT SMT TYPE WIRE TO BOARD DUAL ROW CONNECTOR	
.XX± 0.20	.XX*±		
.XXX± 0.10	.XXX*±	PART NO. TS102WR-S-XXXX	
CUSTOMER DRAWING		DWG NO. 20120506	
APPROVED Paul	CHECKED: Paul	DRAWN: sunny	UNIT mm
		SCALE: 1:1	SHEET: 1 / 1
		PROJ. REV. B	