REV.	ECN NO.	LOCTIONS.	DESCRIPTION	DATE	CHANGER

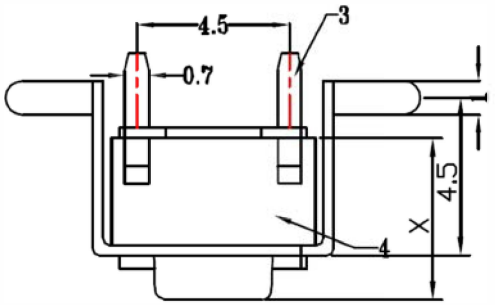



SCHEMATIC

1. Rating : DC 12V. 50mA
2. Travel : 0.25±0.1m/m
3. Operating Force:100 & 160±30gf, 250±50gf
4. Contact Resistance: 50m Ω MAX
5. Life : 100,000 Cycles Min

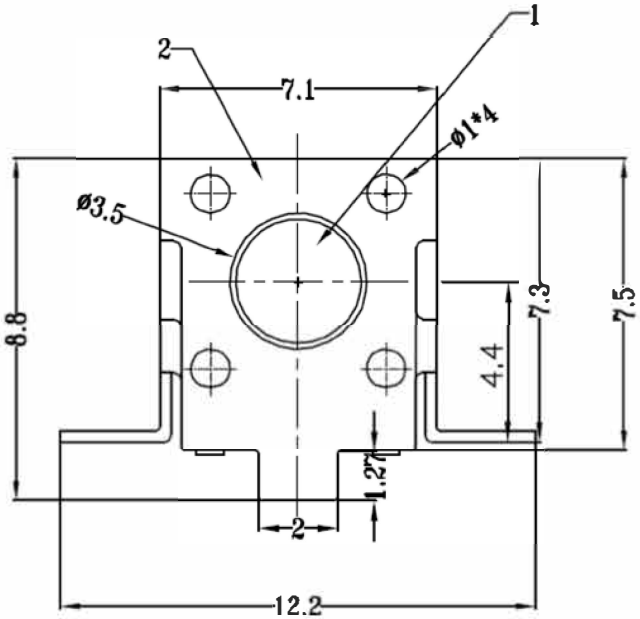

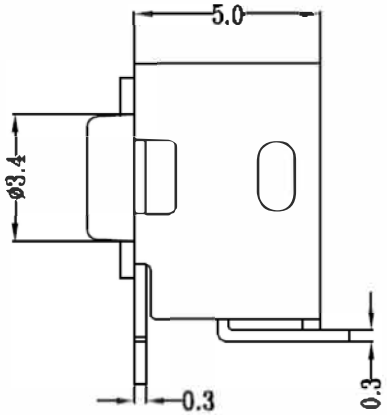

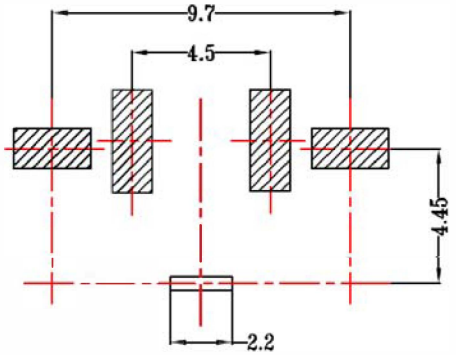

P. C. B. LAYOUT

MODEL NO	X (mm)
RS6601VS-LF	4.3mm
RS6601VSA-LF	5.0mm
RS6601VSB-LF	7.0mm
RS6601VSC-LF	8.0mm
RS6601VSD-LF	9.5mm

NO.	PART NAME	MATERIAL	QTY.	FINISHING
9				
8				
7				
6				
5	CONTACT	PBS	1	Ag CLAD
4	CASE	NYLON 6T	1	BLACK
3	TERMINAL	BRASS STRIP	1	Ag PLATED
2	COVER	MILD STEEL	1	Sn PLATED
1	KNOB	NYLON 6T	1	BLACK

GENERAL TOLERANCE	
X ±	X.° ± 1°
X ± 0.15	.X° ±
XX ± 0.10	.XX° ±
XXX ± 0.05	.XXX° ±

ALL LINK CONN.TECHNOLOGY CORP.

TITLE: TACT SWITCH

CUSTOMER DRAWING

PART NO. RS6601VS-LF SERIES

DWG NO. 20130512

APPROVED	CHECKED:	DRAWN:	UNIT	SCALE:	SHEET:
EVEN	EVEN	sunny	mm	6:1	1 / 1

PROJ. REV. A