
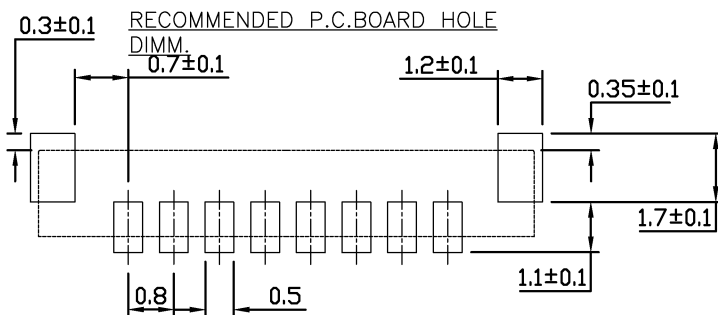
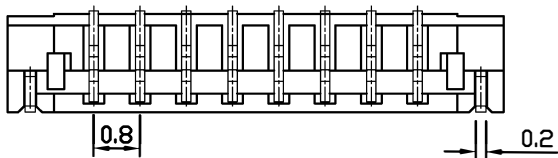
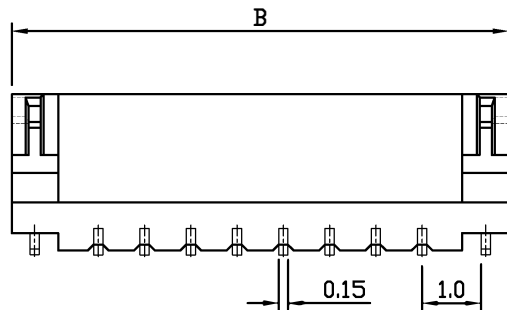



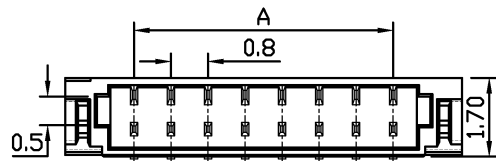

SPECIFICATIONS

Material: Polyamide, UL 94V-0, Natural
Contact: Alloy, Tin-Plated
Solder Tab: Brass, Tin-Plated
Available: 2~15 Pins
Current Rating: 0.5A AC/DC AWG#32
0.2A AC/DC AWG#36
Voltage Rating: 250V AC/DC
Contact Resistance: 20mΩ Max.
Insulation Resistance: 100MΩ Min.
Withstand Voltage: 200V AC/minute
Temperature Range: -25°C~85°C

Ordering Code:
TS080WV-S - X X X X -HF
① ② ③ ④ ⑤

- ① Series No.
② No. of Circuits: 02 to 22
③ Plating:
T= 100μ" Min. Tin Plated
over 50μ" Nickel
G= Gold flash plated over
0.76um(30μ") Nickel
④ A= Reel packing
C= Tube packing
⑤ Process Options:
HF=For Lead Free IR Processes
and Halogen-Free

Circuitis	Dim. A	Dim. B
2	0.80	3.80
3	1.60	4.60
4	2.40	5.40
5	3.20	6.20
6	4.00	7.00
7	4.80	7.80
8	5.60	8.60
9	6.40	9.40
10	7.20	10.20
12	8.80	11.80
14	10.40	13.40
15	11.20	14.20
16	12.00	15.00
17	12.80	15.80
20	15.20	18.20
22	16.80	19.80

GENERAL TOLERANCE		ALL LINK CONN. TECHNOLOGY CORP.	
X±	X*± 1°		
.X± 0.30	.X*±		
.XX± 0.20	.XX*±		
.XXX± 0.10	.XXX*±	TITLE: 0.8MM WIRE TO BOARD CONNECTOR S/T SMT	
CUSTOMER DRAWING		PART NO. TS080WV-S-XXXX-HF	DWG NO. 20120712
APPROVED Kevin	CHECKED: Paul	DRAWN: frank	UNIT mm
		SCALE: 1:1	SHEET: 1 / 1
		PROJ. REV.	REV. A